


AC-DC  
20W AEP20-D(T) XXY

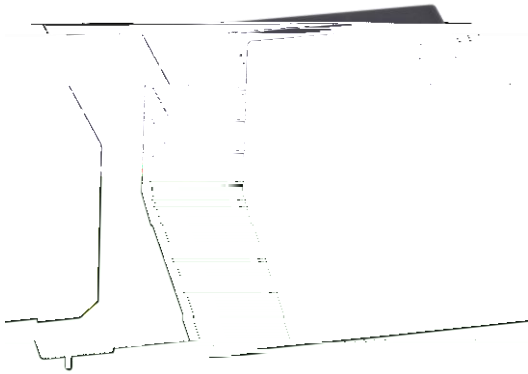

RoHS CE REACH

AEP20-D(T) XXY

2 / 3

85- 305VAC 100- 430VDC

70\* 48\* 23. 5mm

0. 3W

/ /

-40 to +85

3kV

100%

3

AEP 20 - D 12  
1 2 3 4

1. AEP AC/DC
2. 20
3. D Dual ( ) T Triple ( )
4. 12 ± 12V +12V (Vo1)  
0512 5V (Vo1) 12V (Vo2)

		(W)	(V)	(A)	& (mVp-p)	(%)
AEP20-D0512	85- 305VAC 100- 430VDC	20	5	2	100	82
			12	0. 83		
AEP20-D0524		20	5	2	100	83
			24	0. 415		
AEP20-D12		20	12	0. 83	100	82
			-12	0. 83		
AEP20-D15		20	15	0. 66	100	84
			-15	0. 66		



AC-DC  
20W AEP20-D(T) XYY

AEP20-TA

20

5

2

AC-DC  
20W AEP20-D(T) XXYY

		IEC/EN 61000-4-2 level 4 Contact ± 8kV/Air ± 15kV	*	*
		IEC/EN 61000-4-3	"	"
		IEC/EN 61000-4-4 level 4 4kV	"	"
		IEC/EN 61000-4-5 level 4 - 2kV/ - 4kV		
	MTBF	300K hrs min. MIL-HDBK-217F(25 )		
		70*48*23.5mm (L*W*H)		
	1.	TA=25 75% 230VAC		
	2.	0.1uF 47uF 20kHz		
	3.			
	4.	TVS		
	5.	AEP20-DXXYY XX	20%	80%



AC-DC  
20W AEP20-D(T) XXY

