

3


|    |             |     |         |
|----|-------------|-----|---------|
| 1. | DPB         | DIP | DC/DC   |
| 2. | 03          |     |         |
| 3. | 24          |     | 9-36VDC |
| 4. | S Single( ) |     |         |
| 5. | 12          |     |         |
| 6. | R2          |     |         |

|               | (VDC)    | (W)  | (V) | (A)  | (%) |
|---------------|----------|------|-----|------|-----|
| DPB03-24S03R2 | 24(9-36) | 1.96 | 3.3 | 0.6  | 73  |
| DPB03-24S05R2 |          | 3    | 5   | 0.6  | 73  |
| DPB03-24S09R2 |          | 3    | 9   | 0.33 | 74  |
| DPB03-24S12R2 |          | 3    | 12  | 0.25 | 75  |

DPB03





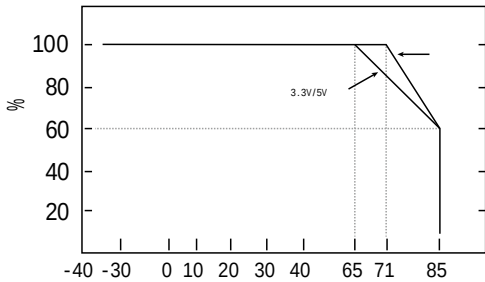

1. C5 C5 80% C6
- D2 TVS
2. EMC EMC

|         | FUSE     | C1       | C2/C3      | C4         | D1       |     | C5        | C6        | D2       |
|---------|----------|----------|------------|------------|----------|-----|-----------|-----------|----------|
| -24SYR2 | F1A/100V | 1uF/100V | 0.1uF/250V | 100uF/50V  | P6KE33A  | S03 | 470uF/10V | 0.1uF/50V | P6KE7.5A |
|         |          |          |            | 100uF/100V | P6KE75A  | S05 | 330uF/10V | 0.1uF/50V | P6KE7.5A |
|         |          |          |            | 100uF/100V | P6KE91A  | S12 | 220uF/16V | 0.1uF/50V | P6KE16A  |
|         |          |          |            | 100uF/250V | P6KE220A | S15 | 100uF/25V | 0.1uF/50V | P6KE20A  |
|         |          |          |            | 100uF/250V | P6KE220A | S24 | 47uF/35V  | 0.1uF/50V | P6KE30A  |



sales@zoeygo.net



+86(20) 3214 4470



51 E