


fi

| | | |
|------|----|---|
| 3 | | IEC60950 EN60950 UL60950 |
| | | I/P-O/P 3kVAC I/P-FG(CASE) 1.5kVAC O/P-FG 0.5kVAC |
| | | I/P-O/P I/P-FG O/P-FG 100Mohms/500VDC 25 70% RH |
| | | EN55011 EN55032 (Cl SPR32) CLASS B |
| | | IEC/EN 61000-4-2 Level 4 Contact $\pm 8kV/Air \pm 15kV$ |
| | | IEC/EN 61000-4-3 Level 4 Lev3 |
| | | IEC/EN 61000-4-4 Level 4 4kV |
| | | IEC/EN 61000-4-5 Level 4 2kV |
| MTBF | | 165K hrs min. MIL-HDBK-217F(25) |
| | | 116*57*38mm (L*W*H) |
| | | 242g/ 15.7kg/ |
| | | 58 / |
| | | 360*300*250mm |
| | 1. | TA=25 75% 230VAC |
| | 2. | 0.1uF 47uF 20Mhz |
| | 3. | |



侧

-BLE

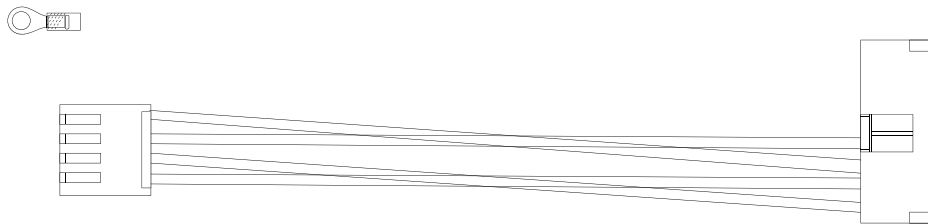


mm [inch]

± 0.5mm



AC OK

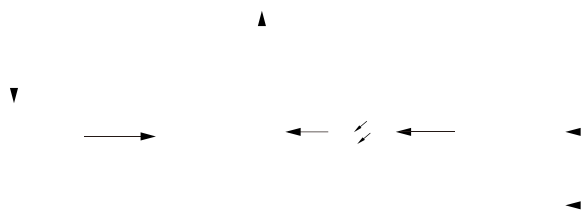

sal es@oeygo. net



+86(20) 3214 4470



51 E