

420W SFC420-SXXVR


SFC420-S29VR		420	29	27.5-30	14.5	240	91
SFC420-S36VR		420	36	33.8-38.0	11.6	240	93
SFC420-S48VR		420	48	47.3-53.2	8.7	240	94
SFC420-S54VR		420	54	51.2-57.8	7.7	240	94

		±1.0%
		±1.0%


	()	1000ms 50ms/230VAC 2000ms 60ms/115VAC
--	-----	---------------------------------------

420W SFC420-SXXVR

		IEC/EN 61000-4-4 level 4 4kV
		IEC/EN 61000-4-5 level 4 - 2kV/ - 4kV
	MTBF	165K hrs min. MIL-HDBK-217F(25)
		127*76.2*37mm (L*W*H)
		344g
		24 /
		360*300*250mm
	1.	TA=25 75% 230VAC
	2.	0.1uF 47uF 20Mhz
	3.	

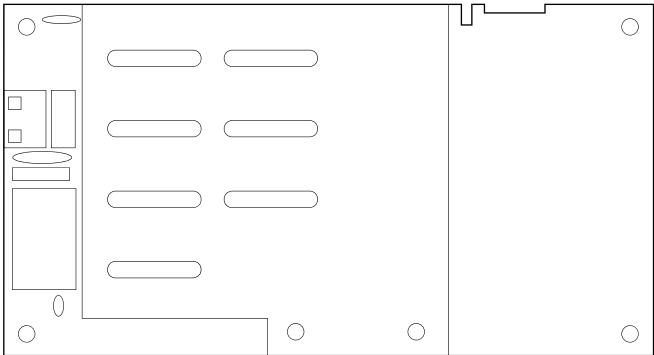

1. mm[inch] ± 0.5mm
2. CLASS
3. CLASS

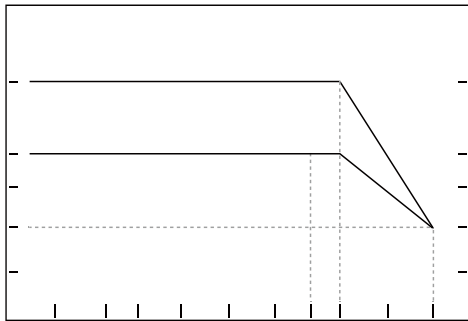

sales@zoeygo.net



+86(20) 3214 4470



51 E